



DISPLAY

Screen Size and Resolution	65" 4K; UHD (3840 x 2160 @ 60 Hz) 75" 4K; UHD (3840 x 2160 @ 60 Hz) 86" 4K; UHD (3840 x 2160 @ 60 Hz)
Screen Type	TFT LCD (Direct LED Backlight)
Blue Light Reduction	Yes
Bonded Glass	Yes
Aspect Ratio	16:9
Display Area	65" 4K: 1429 x 804 mm (56.3 x 31.7 in) 75" 4K: 1652 x 930 mm (65 x 36.6 in) 86" 4K: 1895 x 1066 mm (74.6 x 41.9 in)
Display Colors	1.07 Billion (10-bit)
LCD Viewing Angle	178°
LCD Response Time	8 ms
LCD Refresh Rate (Panel)	60 Hz
LED Lifespan	50,000 hours
Contrast Ratio	5000:1 Dynamic 1200:1 Static
Brightness	400 cd/m2
Ambient Light Sensor	Yes
Glass Hardness	9H (pencil) , 7 (Mohs)
Glass Type	Heat tempered, Anti-Glare
Glass Thickness	4 mm

INTERACTIVITY

INTERACTIVITY	
Vellum Touch Technology	Yes
Continuous Touch Points	20
Touch Resolution	32768 x 32768 px
Response Time	≤5 ms
Touch Accuracy	1 mm
Tracking Rate	4 m/s
Scan Rate	200 Hz
Gestures and Edge Swipes	Windows® supported
Eraser Included (Block Eraser)	Yes
Unique Pen IDs	2
Pen and Touch Differentiation	Yes
Palm Erase	Yes
Palm Rejection	Yes, writing and non-writing hand
Pens Included	Yes, 4 passive pens and 1 active pen
Pen Type	ActivPen; Battery-less pen
Pen Holder	Integrated full-length pen tray
Pen Tip Diameter	3 mm (Eraser 7 mm)
Essential Apps	Including Whiteboard, Annotate, Timer, Spinner, Screen Capture, Screen Share, Browser, PDF Reader, Media Player
Compatibility	Windows® 7 to 11; Mac OS® 10.8 to 10.11; macOS® Sierra 10.12.1 or later; Linux® Ubuntu 20.04 LTS; Chrome OS™

COMPUTING

Operating System	ActivPanel OS
RAM	6.5 GB
Internal Storage	64 GB
CPU	ARM CORTEX - A73 x 4
GPU	ARM Mali-G52 2EE MC2
ActivSync™	Yes
Trusted Platform Module	Yes
Cloud Based User Profiles	Yes

AUDIO

Dual Front-facing Speakers	2 x 18 W
Subwoofer	1 x 15 W
Microphone Array	Yes

CONNECTIVITY

OPS Slot	1
HDMI In (Rear)	2 (1 x 2.0, 1 x 2.1)
HDMI In (Front)	1 (2.0)
Display Port	1 (1.2)
USB-A 2.0 (Rear)	1
USB-C 3.2 (Rear)	1 (100 W Power Delivery)
USB-B 3.0 (Touch, Front)	1
USB-B 3.0 (Touch, Rear)	3
USB-A 3.0 (Front)	2
USB-A 3.0 (Rear)	2
MicroSD Slot	Yes
LAN In (RJ45)	1 Gbps
LAN Out (RJ45)	1 Gbps
Wake-on-LAN	Yes
Wi-Fi (Client)	IEEE 802.11 a/b/g/n/ac/ax, Wi-Fi 6 and dual band supported
Bluetooth	5.0
HDMI Out	1 (2.0)
VGA In	1
PC Audio (3.5 mm)	1
AV-In (3.5 mm)	1
Mic (3.5 mm)	1
Audio Out (3.5 mm)	1
RS-232	1
Proximity Sensor for Warm Boot	Yes
NFC (Near-field Communication)	Yes



PANEL MANAGEMENT

OTA Updates	Yes
Promethean Panel Management	Yes

POWER

Power Requirements	100 V - 240 V AC
Energy Star Power Consumption	65" 4K: 119 W 75" 4K: 163 W 86" 4K: 194 W
Power Consumption (Standby)	<= 0.5 W
Ultra-Quiet Fanless Design	Yes

ENVIRONMENTAL

Operating Temperature	0 °C to 40 °C (32 °F to 104 °F)
Storage Temperature	-15 °C to 55 °C (-5 °F to 131 °F)
Operating Humidity	20% to 80% non-condensing humidity
Storage Humidity	20% to 90% non-condensing humidity

COMPLIANCE & CERTIFICATION

Regulatory Certifications	CE, FCC, IC, UL, CUL, CB, RCM
Energy Star Certified	65" 4K: Yes 75" 4K: Yes
	86" 4K: Yes

PHYSICAL SPECIFICATIONS

Panel Dimensions 65": 1508 x 945 x 85 mm (59.4 x 37.2 x 3.3 in) 75": 1730 x 1070 x 86 mm (68.1 x 42.1 x 3.4 in) 86": 1974 x 1207 x 86 mm (77.7 x 47.5 x 3.4 in) Packed Dimensions 65": 1655 x 1035 x 225 mm (65.2 x 40.7 x 8.9 in) 75": 1870 x 1175 x 225 mm (73.6 x 46.2 x 8.9 in) 86": 2125 x 1295 x 260 mm (83.7 x 51 x 10.2 in) Panel Net Weight 65": 44.5 kg (98.1 lb) 75": 57.8 kg (127.4 lb) 86": 73.3 kg (161.6 lb) Packed Weight 65": 62.2 kg (137.1 lb) 75": 79.2 kg (174.6 lb) 86": 96.4 kg (212.5 lb) Wall Mount Dimensions 1010 x 720 x 52 mm (39.8 x 28.3 x 2.0 in) VESA Mount Point 65": 600 x 400 mm (23.6 x 15.7 in) 75": 800 x 400 mm (31.5 x 15.7 in) 86": 800 x 600 mm (31.5 x 23.6 in)		
75": 1870 x 1175 x 225 mm (73.6 x 46.2 x 8.9 in) 86": 2125 x 1295 x 260 mm (83.7 x 51 x 10.2 in) Panel Net Weight 65": 44.5 kg (98.1 lb) 75": 57.8 kg (127.4 lb) 86": 73.3 kg (161.6 lb) Packed Weight 65": 62.2 kg (137.1 lb) 75": 79.2 kg (174.6 lb) 86": 96.4 kg (212.5 lb) Wall Mount Dimensions 1010 x 720 x 52 mm (39.8 x 28.3 x 2.0 in) VESA Mount Point 65": 600 x 400 mm (23.6 x 15.7 in) 75": 800 x 400 mm (31.5 x 15.7 in)	Panel Dimensions	75": 1730 x 1070 x 86 mm (68.1 x 42.1 x 3.4 in)
75": 57.8 kg (127.4 lb) 86": 73.3 kg (161.6 lb) Packed Weight 65": 62.2 kg (137.1 lb) 75": 79.2 kg (174.6 lb) 86": 96.4 kg (212.5 lb) Wall Mount Dimensions 1010 x 720 x 52 mm (39.8 x 28.3 x 2.0 in) VESA Mount Point 65": 600 x 400 mm (23.6 x 15.7 in) 75": 800 x 400 mm (31.5 x 15.7 in)	Packed Dimensions	75": 1870 x 1175 x 225 mm (73.6 x 46.2 x 8.9 in)
75": 79.2 kg (174.6 lb) 86": 96.4 kg (212.5 lb) Wall Mount Dimensions 1010 x 720 x 52 mm (39.8 x 28.3 x 2.0 in) VESA Mount Point 65": 600 x 400 mm (23.6 x 15.7 in) 75": 800 x 400 mm (31.5 x 15.7 in)	Panel Net Weight	75": 57.8 kg (127.4 lb)
VESA Mount Point 65": 600 x 400 mm (23.6 x 15.7 in) 75": 800 x 400 mm (31.5 x 15.7 in)	Packed Weight	75": 79.2 kg (174.6 lb)
75": 800 x 400 mm (31.5 x 15.7 in)	Wall Mount Dimensions	1010 x 720 x 52 mm (39.8 x 28.3 x 2.0 in)
	VESA Mount Point	75": 800 x 400 mm (31.5 x 15.7 in)

PACKED CONTENTS

nat's in the Box	1x ActivPanel 9 Premium
	1x 3 m Length HDMI Cable
	1x 3 m Length USB Cable (A-B)
	1x 3 m Regional Power Cable
	1x 2 m Length USB-C Cable
	1x Remote Control
	2x Batteries for Remote
	4x Pens
	1x Block Eraser
	1x Sealed Antistatic Bag
	8x Desiccant
	4x VESA Mount Screws (M6)
	1x Mini PC Bracket with Screws (x2)
	2x NFC Cards
	1x Quick Install Guide
	1x Promethean Wi-Fi/Bluetooth Module
	3x Antennae
	1x Wi-Fi/Bluetooth Module User Guide
	1x Wall Mount
	1x HDMI to USB Capture Card
	1x Logitech K400+ Wireless Keyboard with Trackpad
	1x Promethean ActivPen

INSTALLATION

The installation of this product should be completed by a qualified installer. Use of components not supplied by Promethean or not meeting minimum specifications may impact performance, safety and warranty. For more information, visit Support. Promethean World.com.

WARRANTY


Warranty term and upgrade options vary by region. Contact your local reseller or distributor for information and visit PrometheanWorld.com/Warranty.

SUPPORT

For all Promethean products, visit Support.PrometheanWorld.com.





TECHNICAL DRAWINGS

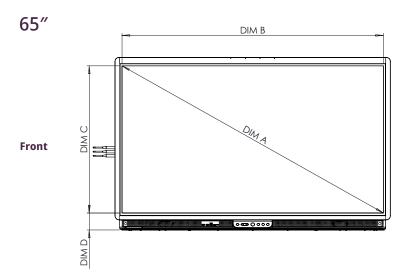

А	1642mm [64.6in]
В	1430mm [56.3in]
С	806mm[31.7in]
D	93mm[3.6in]
Е	128mm [5.0in]
F	85mm[3.4in]
G	945mm[37.2in]
Н	1508mm [59.4in]
1	600mm [23.6in]
J	400mm[15.7in]
K	305mm[12.0in]
L	240mm [9.4in]


Back

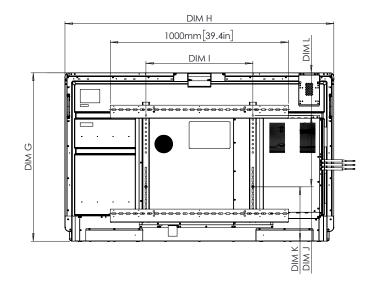

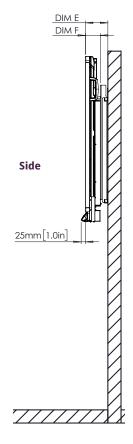





TECHNICAL DRAWINGS

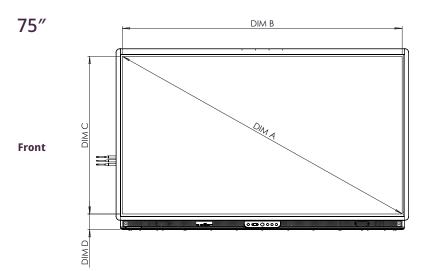

DIMENSION (mm)
1896mm [74.7in]
1652mm [65.0in]
930mm [36.6in]
93mm[3.6in]
128mm [5.0in]
86mm [3.4in]
1070mm [42.1in]
1730mm[68.1in]
800mm [31.5in]
400mm[15.7in]
446mm[17.5in]
224mm[8.8in]

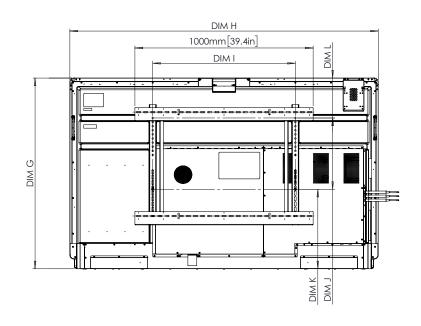




Back



TECHNICAL DRAWINGS

86"

Front

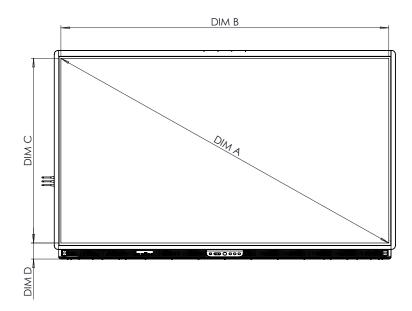

DIM	DIMENSION (mm)
Α	2177mm[85.7in]
В	1897mm[74.7in]
С	1068mm[42.0in]
D	93mm[3.6in]
E	128mm[5.0in]
F	86mm[3.4in]
G	1207mm [47.5in]
Н	1975mm [77.8in]
1	800mm[31.5in]
J	600mm[23.6in]
K	316mm[12.4in]
L	291mm[11.5in]

Back

